




Components Included:



(2) 24" mic bars




(1) center bracket with 5/8"-27 female threading




(1) threaded insert



(2) security lugs



(1) speaker stand adapter




(4) multi-position mounting lugs with 5/8"-27 male threading




(2) center bracket mounting lugs with 5/8"-27 male threading

If any parts are missing, please contact On-Stage customer service.


Assembly Instructions:

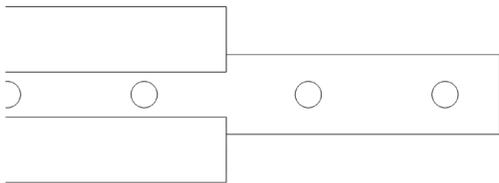



1. With the mic bar track facing up, slide the threaded insert into the end of one of the mic bars until two of the insert's holes are inside the bar, leaving the other two holes exposed.

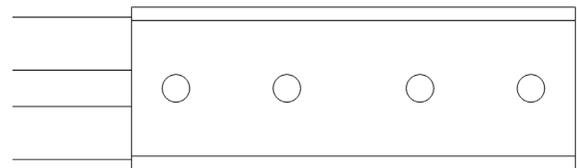

2. With the socket of the center bracket facing down, slide the center bracket over the threaded insert and mic bar.

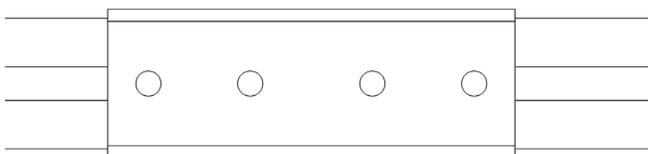

3. Slide the second mic bar into the opposite end of the center bracket so the threaded insert slides into the end of the mic bar as in step 1. Push the two mic bars together until they meet in the center. Align the four holes of the threaded insert with the four holes of the center bracket.

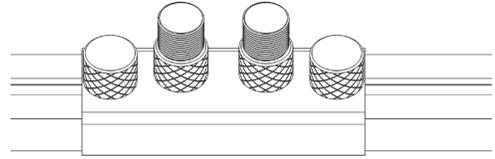
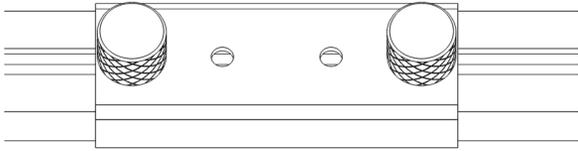


4. Depending on your desired mic/antenna position, screw the two security lugs into either the two inner or the two outer holes of the bracket and threaded insert.

5. Screw the two center bracket mounting lugs into the remaining two holes of the center bracket and threaded insert




6. Loosen one multi-position mounting lug by turning the upper knurled cylinder counterclockwise until the lower sliding block can travel freely through the mic bar. Insert the lower sliding block into the end of the mic bar, leaving the metal washer above the mic bar track so that the lower sliding block is the only part inside the bar. Slide the mounting lug to your desired mic/antenna position and tighten the mounting lug by turning the upper knurled cylinder clockwise to secure it in place.

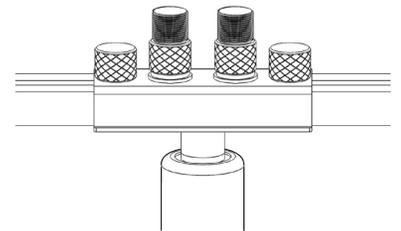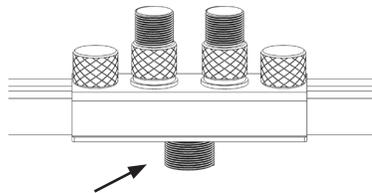

7. Repeat step 6 for the remaining three multi-position mounting lugs.

8. (a) To mount the mic bar on a mic stand, align the socket of the center bracket with the threaded end of the mic stand shaft. Screw the mic stand shaft into the socket.

8. (b) To mount the mic bar on a speaker stand, screw the speaker stand adapter into the socket of the center bracket. Slide the socket of the speaker stand adapter over a 1 3/8" speaker stand pole mount and tighten the knob on the adapter.

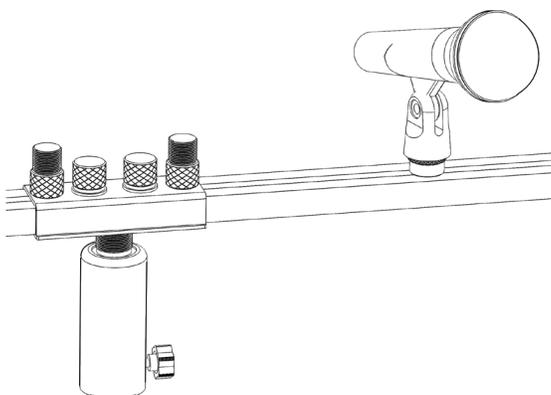

9. Mount mics (clips not included), antennas, or anything with a compatible 5/8"-27 threaded base to the six mounting lugs. Reference the weight capacity of the mic stand or speaker stand to avoid overloading.